

# Hand Pallet Truck



Conforms to EN ISO3691-5:2009  
Based on Directive 2006/42/EC

1KG=2.205LB 1INCH=25.40MM

Model	BF
load rating	12500kg
service weight	55-60kg
fork's minimum altitude	75/85mm
front wheel's size	160/ 180
rear-wheel's size	70x80( 70x60)
lifting altitude	190/200mm
overall height handle top from ground	1176.5mm
overall length	1470/1520/1590
fork's size	53x150x1100/1150/1220
fork's width	380/480/450/520/550/680
The wheelbase center ground clearance	22/32mm
turning radius	1215/1265/1335
Aisle width, with pallet 1000x1200 crosswise	1670/1720/1790
Aisle width, with pallet 800x1200 lengthwise	1770/1770/1790



Over  
**5,000,000**  
units sold

# Hand Pallet Truck

## Innovative design, comprehensive testing and highest quality !

- Most standard and popular model with capacity 2500 - 3500kgs.
- Supporting base : the new type is thicker in case of bending problems.
- Forks: the thickness of the new type is 53mm to make strength increased.
- Great innovation on part of wheel frame:
  - A. The new type wheel frame enhances strength to prevent distortion problems.
  - B. The new type frame without roll ring & roll sheath.
  - C. Adopts double-spring pins construction with strengthening ribbing under triangle to prevent pin snapping problems.
- With Copping Supporting NOG & strengthening ribbing under top triangle cover.
- Complete pump design with reliable leak-proof pump eliminating maintenance and extending the service time.
- 210 steering arc, and small turning radius.
- Fork Lowering speed is controllable, operated by hand control and foot pedal.
- Ergonomic rubber wrapped handle, which is comfortable and convenient to operate.
- Entry / exit roller, more freely travel.
- Equipped with over-load valve, with long service time.
- 3 position hand control - Taise, Lower, Neutral.
- 2 lubrication grease nipples on all movable parts for easy maintenance.
- Adjustable pump cap ensures a long service life.
- Ergonomic large rubber handle with three control lever.

Option: 1) Nylon wheel, polyurethane wheel, rubber wheel, single fork roller or tandem fork rollers.

2) Fork length: 800mm, 900mm, 1000mm.

3) Foot pedal release.

4) Pump color: black painting, silver painting, silver galvanized

*Professional*



Adjustable pump cap





Adjustable straight tappet



Option: fully rubber wrapped handle



Entry roller for easy operation  
Innovative wheel frame

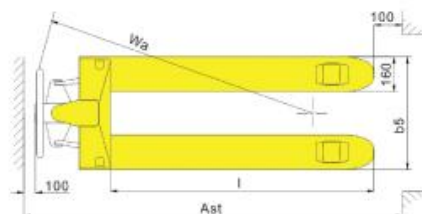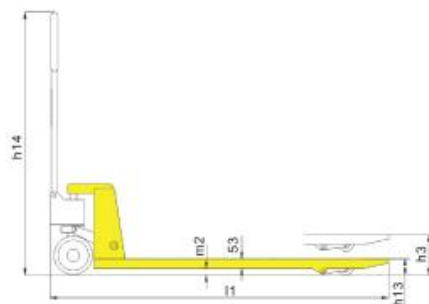

( mm )

**Remark:** Special size for width and length can be made according to customer's requirements.



Conforms to EN ISO3691-5:2009  
Based on Directive 2006/42/EC